

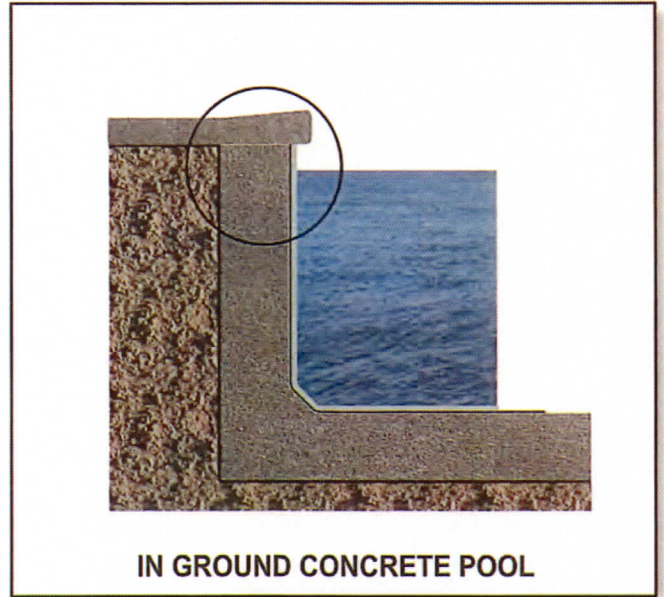


BASECRETE WATERPROOFING

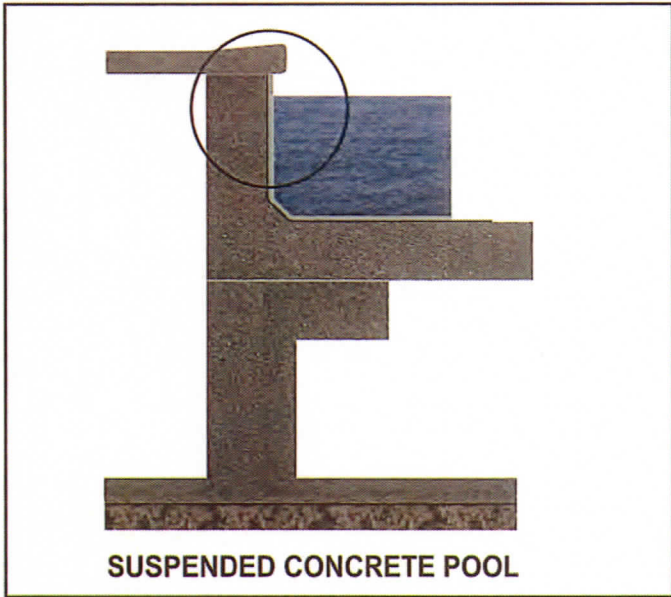

**BASECRETE
WATERPROOFING**
SPACE FOR TECHNICAL DATA

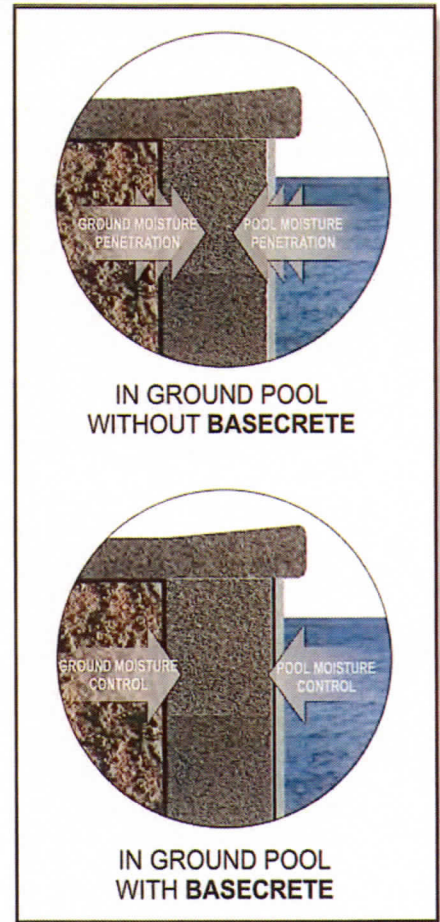

BASECRETE


Last revise:

Issued: Nov 2014

02-02

BASECRETE

www.basecreteusa.com

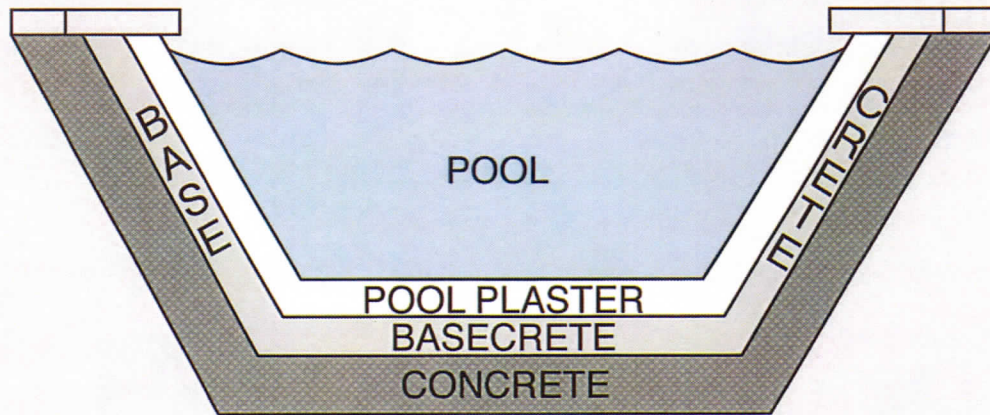

Description:

- A cement compatible all acrylic emulsion developed for use in cement based products.
- Extremely versatile. It has been engineered for use as a cement modified in base coats as well as a binder for top coats.
- Provides exceptional easy water resistance adhesive strength, binding power, flexibility and exterior durability.

Key Attributes:

- Rheology and workability
- Improves hydration
- Water resistance
- Bond strength
- Flexural strength
- Mechanical strength
- Exterior durability
- Basecrete is nontoxic and poses no threat to application on environment

Applications:

- Basecoats and Top Coats
- Adhesives
- Cement modifier for grouts and mortars
- Film forming bonding agent to bond to new concrete
- Overlays to existing concrete surfaces
- Brush spray or towel (swimming pool brush or spray)
- Coverage will depend on surface porosity and thickness & application
- Application not recommended when temperature is less than 40°F for at least 48 hours before and after application
- For swimming pools: application 2 coats, 1 coat vertical and 1 horizontal
- For swimming pools: Trowel not recommended for surface must be rough for mechanical adhesion

Packaging:

- Totes; 5 gallon pail